

ELEKTRA

Version

Collection

Mirabilia

EAN code

8034122342429



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

- Scotch brite stainless steel (AISI 304)
- Glass
- Perimeter suction
- Electronic control
- LED ambient light
- LED lighting
- Metallic grease filter, removable and washable
- Charcoal filter included
- Possible to duct wall mounted from rear

OPTIONAL ACCESSORIES

- KACL.575#I**  
Extension H700 - Wall
- KACL.576#I**  
Extension H960 - Wall
- KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless
- KACL.786#41F**  
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**  
Remote under-roof motor 1300 m3/h
- KACL.798#41F**  
Remote under-roof motor 950 m3/h
- KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)

TECHNICAL FEATURES

- Installation type**  
Wall
- Finishing**  
Scotch brite stainless steel (AISI 304)
- Glass
- Motor**  
800 m³/h
- Type of control**  
Electronic control
- Speed settings**  
4
- Lighting**  
Led 2x1,2 W - 3200 K
- Ambient lighting**  
Ambient led
- Filter**  
2 x Metallic filter "Base" - 277x294 mm
- Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6 (included)
- Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- ELEKTRA Gross weight**  
22 kg
- Net weight**  
18 kg
- Volumes**  
0.22 m³
- Packaging size**  
Length  
915 mm  
Height  
530 mm  
Depth  
455 mm
- GLASS KIT Elektra - Wall 67 cm Gross weight**  
7.4 kg
- Net weight**  
6 kg
- Volumes**  
0.07 m³
- Packaging size**  
Length  
515 mm  
Height  
440 mm  
Depth  
320 mm

CONSUMPTION AND CONNECTION FEATURES

- Voltage**  
220-240V
- Frequency**  
50-60Hz
- Plug type**  
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**  
590 m³/h  
I.E.C. 61591
- Maximum noise level**  
64 dB(A)re1pW  
I.E.C.60704-2-13
- Maximum pressure (Pa)**  
500 Pa
- Max. motor power**  
203 W
- ENERGY CLASS**  
B



## ELEKTRA

### Version

### Collection

Mirabilia


### EAN code

8034122342429

## MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   | 4   |
|--------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 45  | 50  | 55  | 64  |
| Capacity (m3/h)<br>I.E.C.61591             | 230 | 300 | 380 | 590 |
| Maximum pressure (Pa)                      | 390 | 420 | 460 | 500 |
| Motor Power (W)                            | 134 | 156 | 180 | 203 |
| Air outlet                                 | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE

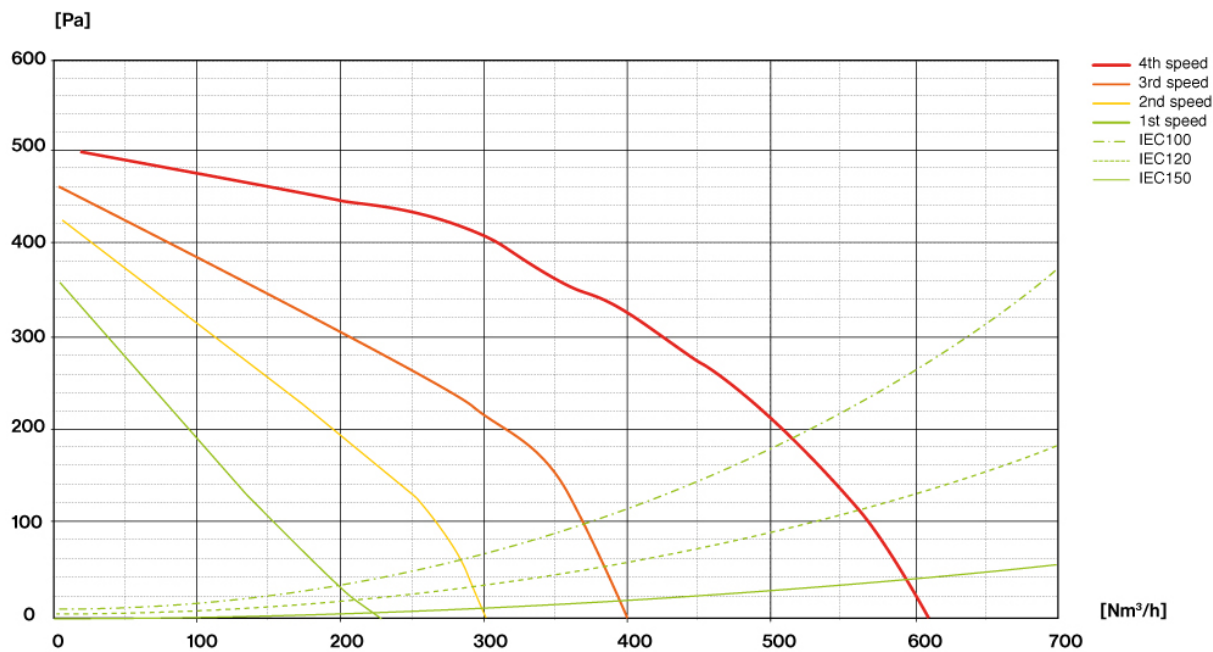

ELEKTRA

Version


Collection

Mirabilia

EAN code

8034122342429

ENERGY LABEL

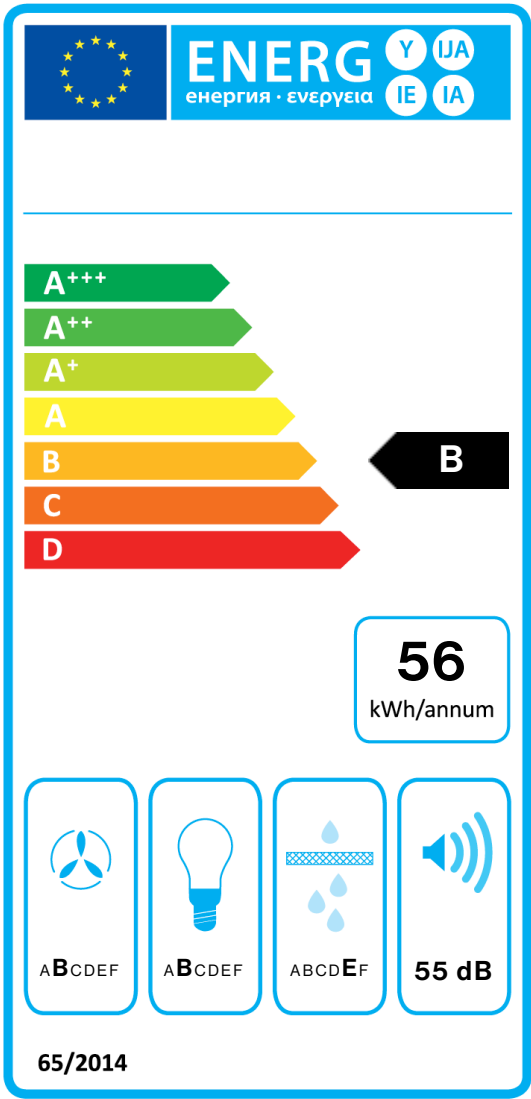

| PF         |            |       |
|------------|------------|-------|
| S          | Falmec Spa |       |
| M          |            |       |
| AEC        | 55,7       | kWh/a |
| EEC        | B          |       |
| FDE        | 25,6       |       |
| FDEC       | B          |       |
| LE         | 20,5       |       |
| LEC        | B          |       |
| GFE        | 60,0       |       |
| GFEC       | E          |       |
| Qmin       | 230,0      | m³/h  |
| Qmax       | 380,0      | m³/h  |
| Qboost     | 590,0      | m³/h  |
| SPEmin     | 45         | dBa   |
| SPEmax     | 55         | dBa   |
| SPEboost   | 64         | dBa   |
| PO         | -          | W     |
| PS         | 0,48       | W     |
| PI         |            |       |
| F          | 1.1        |       |
| EEl        | 62,4       |       |
| Qbep       | 287,0      | m³/h  |
| Pbep       | 415        | Pa    |
| Qboost     | 590,0      | m³/h  |
| Wbep       | 129,0      | W     |
| WL         | 5,30       | W     |
| Emiddle    | 109        | lex   |
| Lwa-SPEmax | 55         | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.