

GRUPPO INCASSO NRS

Version
Built-in 50 cm - 800 m3/h

Collection
Silence - NRS

EAN code
8034122343105



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

NRS technology for a quieter kitchen
Electronic control
Metallic grease filter, removable and washable
Optional combined regenaleble Carbon.Zeo filter
Remote control included
Dynamic LED Light (2700K - 5600K)

Availability Carbon.Zeo filter
KACL.961 for hoods produced from 11/14/2020

OPTIONAL ACCESSORIES

KACL.400
Silent / Conveyor NRS
KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
KACL.961
Charcoal and Zeolite filter
105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI 304)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Led 2x1,2 W - 3200 K
Filter
Top - Gr. Incasso NRS / 50 cm
Charcoal filter
Charcoal and Zeolite filter (optional)
Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


Gross weight
26.2 kg
Net weight
21.6 kg
Volumes
0.26 m³
Packaging size
Length
950 mm
Height
410 mm
Depth
655 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
610 m³/h
I.E.C. 61591
Maximum noise level
55 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
582 Pa
Max. motor power
224 W
ENERGY CLASS
B



GRUPPO INCASSO NRS

Version
Built-in 50 cm - 800 m3/h


Collection
Silence - NRS

EAN code
8034122343105

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	55
Capacity (m3/h) I.E.C.61591	190	300	380	610
Maximum pressure (Pa)	490	500	520	582
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

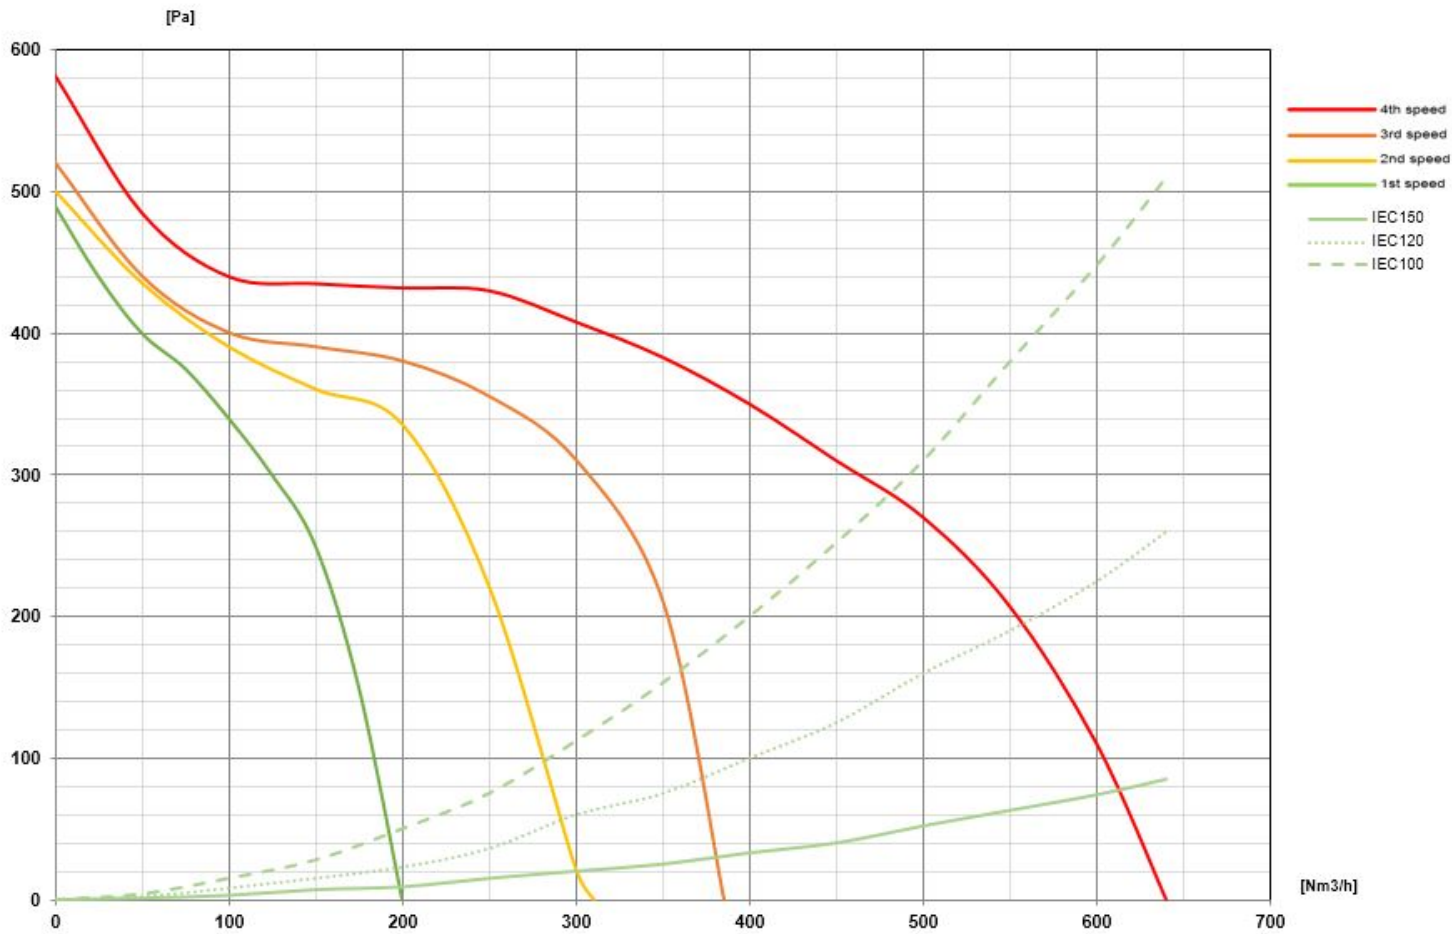


GRUPPO INCASSO NRS

Version
Built-in 50 cm - 800 m3/h

Collection
Silence - NRS

EAN code
8034122343105

ENERGY LABEL

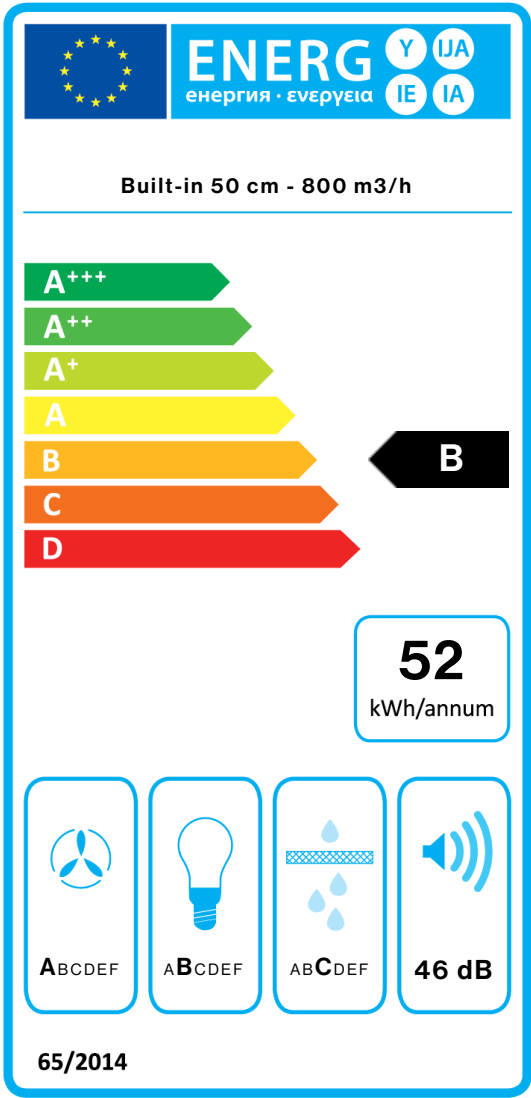

PF		
S	Falmec Spa	
M	Built-in 50 cm - 800 m3/h	
AEC	51,7	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,3	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.